

P15V50N5

PFC Device Corporation

15A 50V MOS Schottky Rectifier

Major ratings and characteristics

Characteristics	Values	Units	
I _{F(AV)} Rectangular	15	А	
Waveform			
V_{RRM}	50	V	
V _F @ 15A , Tj=125 °C	0.45	V, typ.	
T _J Operating Junction	40 to 1150	°C	
Temperature	-40 to +150		

Features

- Ultra Low Forward Voltage Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- 150°C Operating Junction Temperature
- Lead Free Finish, RoHS Compliant
- Green Molding Compound (No Br, Sb)

P15V50N5 A A C DFN 5X6

Typical Applications

Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications Characteristics P15V50N5

1. Characteristics

Maximum Ratings Characteristics $(T_A = 25 \, ^{\circ}\text{C} \text{ unless otherwise specified})$

Parameter	Symbol	Values	Units
DC Blocking Voltage	V_{RM}		
Working Peak Reverse Voltage	V_{RWM}	50	Volts
Peak Repetitive Reverse Voltage	V_{RRM}		
Average Rectified Forward Current		15	Amps
Per device	Io		
(Rated VR-20Khz Square Wave) - 50% duty cycle			
Peak Forward Surge Current - 1/2 60hz	I _{FSM}	300	Amps
Peak Repetitive Reverse Surge Current (2uS-1Khz)	I _{RRM}	2	Amps
Typical Thermal Resistance			
Thermal Resistance junction to Ambient Note (1)	$R\theta_{JA}$	72	°C/W
Thermal Resistance junction to Ambient Note (2)	$R\theta_{JA}$	30	
Maximum Rate of Voltage Change (at Rated VR)	dv/dt	10000	V/uS
Operating Junction Temperature	erature T _J - 40 to +150		
Storage Junction Temperature	T _{STG}	- 40 to +150	

Electrical Characteristics - (per leg)

 $(T_A = 25$ °C unless otherwise specified)

Parameter	Test Conditions		Symbol	Тур.	Max.	Units
Instantaneous	IF 1F A	$T_J = 25$ °C			0.51	Volte
Forward Voltage	IF = 15 A	T _J = 125 °C		0.45	0.49	Volts
Instantaneous	At V _{RM}	$T_J = 25$ °C	ID*		500	uA
Reverse Current		T _J = 125 °C	IR*		100	mA

^{*} Pulse width < 300 uS, Duty cycle < 2%

Note 1. FR-4 PCB, 2 oz Copper. Minimum recommended pad layout

Note 2. Polymide PCB, 2 oz Copper. Cathode pad dimensions 18.8x14.4mm , Anode pad dimensions- (5.6x14.4mm)




Version 4.2 2 / 5

Characteristics P15V50N5

2. Characteristics Curves

Ratings and Characteristics Curves

($TA = 25^{\circ}C$ unless otherwise specified)

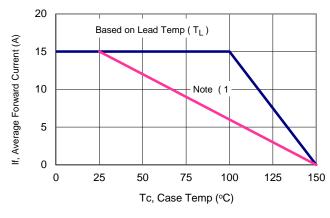

360 300 Peak Forward Surge Current (A) 240 180 120 60 0 10 100 Number of Cycles at 60 Hz

Figure 1: Current Derating, Case

100 If, Instantaneous Forward Current (A) 10 Tj=125°C =100°C Tj=75°C Tj=25°C 200 250 300 350 400 Vf, Instantaneous Forward Voltage (mV)

Figure 2: Maximum Repetitive Surge Current

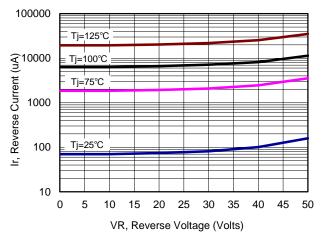


Figure 3: Typical Forward Voltage

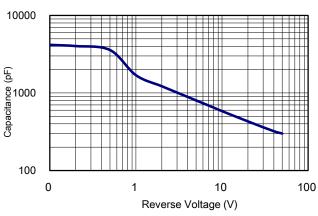


Figure 4: Typical Reverse Current

Figure 5: Typical Junction Capacitance




Version 4.2 3/5

www.pfc-device.com

Characteristics P15V50N5

3. Marking information

Top Marking Rule



P15V50 = Product Type Marking Code

A = Assembly Code


YM = Date Code

Y = Last digits of year

M = Month code

4. Package information

Suggested Package Outline Dimensions millimeters

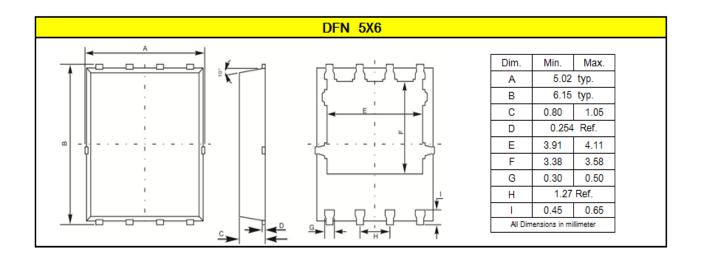




Version 4.2 4 / 5

Characteristics P15V50N5

5. Packing and Ordering information

Packing information millimeters

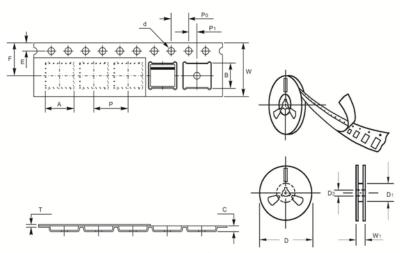

Item	Symbol	Dimension
Carrier width	Α	6.3±0.10
Carrier length	В	5.3±0.10
Carrier depth	С	1.2±0.10
Sprocket hole	d	1.5±0.10
Reel outside diameter	D	330.0±2.0
Reel inner diameter	D1	100±1.0
Feed hole diameter	D2	13.5±1.0
Stocket hole position	Е	1.75±0.10
Punch hole position	F	5.5±0.05
Punch hole pitch	Р	8.0±0.10
Sprocket hole pitch	P0	4.0±0.10
Embossment center	P1	2.0±0.10
Totall tape thickness	Т	0.3±0.05
Tape width	W	12.0±0.15
Reel width	W1	18.4±1.5

Ordering information

Part Number	Package	Base Quantity	Delivery mode
P15V50N5	DFN 5X6	3000	13" diameter plastic tape and reel

Note: For Halogen Free molding compound, add "H" suffix to part number above.

Mechanical

■ Molder Plastic: UL Flammability Classification Rating 94V-0

Device Weight: 0.003 ounces (0.093grams) – DFN 5X6

PFC Device Corp reserves the right to make changes without further notice to any products herein. PFC Device Corp makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does PFC Device Corp assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in PFC Device Corp data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical" must be validated for each customer application by customer's technical experts. PFC Device Corp does not convey any license under its patent rights nor the rights of others. PFC Device Corp products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the PFC Device Corp product could create a situation where personal injury or death may occur. Should Buyer purchase or use PFC Device Corp products for any such unintended or unauthorized application, Buyer shall indemnify and hold PFC Device Corp and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that PFC Device Corp was negligent regarding the design or manufacture of the part.

Version 4.2 5 / 5